
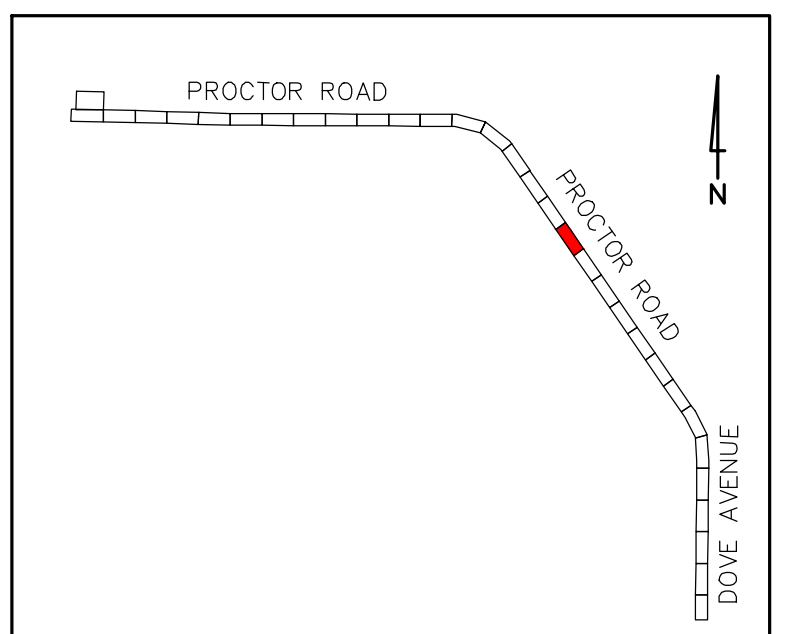
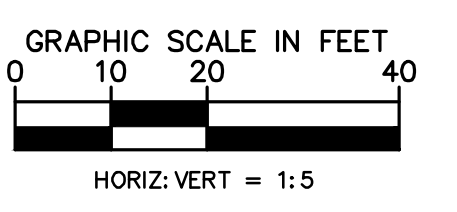


MATCH LINE STA 94+00
SEE SHEET 21 FOR CONTINUATION

MATCH LINE STA 99+00
SEE SHEET 23 FOR CONTINUATION



KEY MAP

- LEGEND
- PROP. ASPHALT MILL/RESURFACE (SEE DETAILS, SHEET 78)
 - PROP. ROAD REPAIR FOR UTILITY INSTALLATION
 - PROP. CONCRETE WALK/CURB RESTORATION

NOTES:

1. CONTRACTOR TO FOLLOW RESTRAINED LENGTHS SET IN RESTRAIN LENGTH DETAILS ON SHEET 76. JOINT LENGTHS SHOWN ON PLANS REPRESENT THE MINIMUM DISTANCE OF REQUIRED RESTRAINED JOINTS.
2. CONSTRUCTION DEWATERING SHALL BE CONDUCTED IN ACCORDANCE WITH ALL FEDERAL, STATE, AND LOCAL REQUIREMENTS INCLUDING BUT NOT LIMITED TO CHAPTERS 62-821.300 AND 62-620 OF THE FLORIDA ADMINISTRATIVE CODE (FAC).
3. REFER TO DETAILS ON SHEET 78 FOR COUNTY ROADWAY REPAIR REQUIREMENTS
4. REFER TO DRIVEWAY RESTORATION DETAIL, SHEET 78, FOR COUNTY RESTORATION REQUIREMENTS.
5. AREAS IDENTIFIED FOR MILL/RESURFACE ALONG PROCTOR ROAD TO BE MILLED ONLY, AND SHALL NOT BE RESURFACED AS PART OF THIS PROJECT. SEE "PROCTOR ROAD REPAIR SECTION", SHEET 78.

*NOTES:
THE ELEVATIONS OF THE UTILITIES MARKED WITH AN ASTERISK (*) HAVE BEEN ASSUMED ON THE BASIS OF TYPICAL ANTICIPATED SOIL COVERAGE. CONTRACTOR SHALL NOT RELY ON THIS INFORMATION FOR CONSTRUCTION, BUT SHALL BE RESPONSIBLE FOR FIELD LOCATIONS (HORIZONTAL AND VERTICAL) OF ALL UTILITIES CROSSING THE PROPOSED WATER MAIN. CONTRACTOR SHALL INCLUDE IN THE UNIT COST OF THE SUBJECT WATER MAIN CONSTRUCTION, THE COST OF UTILITY ADJUSTMENTS NECESSARY TO ATTAIN DESIGN MINIMUM SEPARATION FOR UTILITIES CONFLICTING WITH THE CONSTRUCTION OF THE PROPOSED WATER MAIN. INTERRUPTIONS OF ANY EXISTING UTILITY SERVICES SHALL BE NOTICED TO AFFECTED CUSTOMERS A MINIMUM OF 48 HOURS IN ADVANCE AND SHALL NOT EXCEED 4 HOURS IN DURATION.

WHERE CONCRETE REPAIRS ARE NECESSARY AND EXPANSION JOINTS ARE PRESENT, CONTRACTOR TO REMOVE AND REPLACE CONCRETE UP TO THE NEXT EXPANSION JOINT; OTHERWISE, REPLACE CONCRETE AS NECESSARY.

GROUNDWATER / DEWATERING NOTE:
THE PRESENCE OF GROUNDWATER SHOULD BE ANTICIPATED ON THIS PROJECT. CONTRACTOR'S BID SHALL INCLUDE CONSIDERATION FOR THIS ISSUE. WHEN PERFORMING GRADING OPERATIONS DURING PERIODS OF WET WEATHER, PROVIDE ADEQUATE DEWATERING, DRAINAGE AND GROUND WATER MANAGEMENT TO CONTROL MOISTURE OF SOILS.

CONSTRUCTION DRAWINGS



▲	BID ADDENDUM REVISION	9/08/2020	DAL
No.	REVISIONS	DATE	BY

Kimley»Horn

1777 MAIN STREET, SUITE 200, SARASOTA, FL 34236
PHONE: 941-379-7600
WWW.KIMLEY-HORN.COM CA 00000696

KHA PROJECT
DATE 9/8/2020
SCALE
DESIGNED BY JWW
DRAWN BY DMA
CHECKED BY AMM

Sarasota County

PEACE RIVER INTERCONNECT AND POTABLE WATER TRANSMISSION MAIN
SARASOTA COUNTY

LICENSED PROFESSIONAL
ASHLEY M. MIELE, P.E.
FL LICENSE NUMBER 66476

PROCTOR ROAD - DOVE AVENUE
STA 94+00.00 TO 99+00.00

SHEET NUMBER
22